


WORX


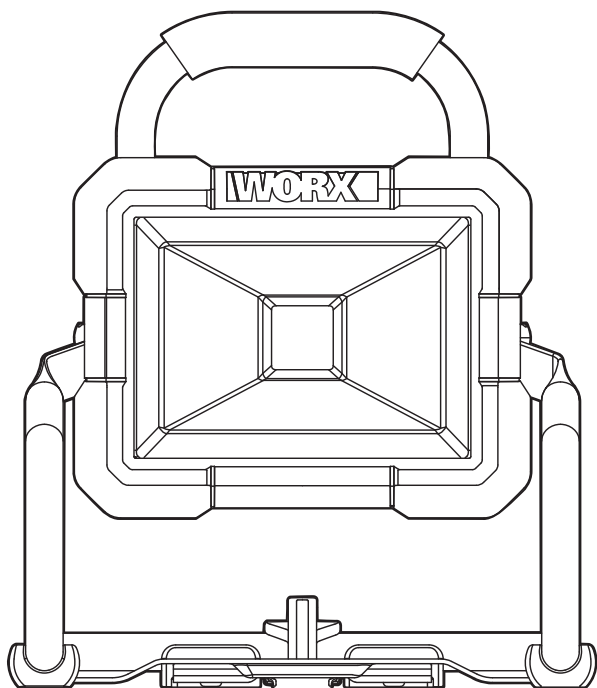








20V^{MAX}
LITHIUM



SAFETY AND OPERATING MANUAL

LED Worklight

WX026 WX026.9

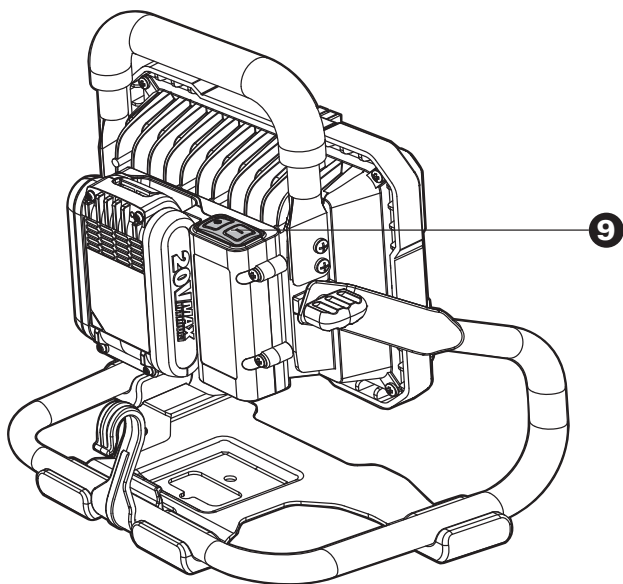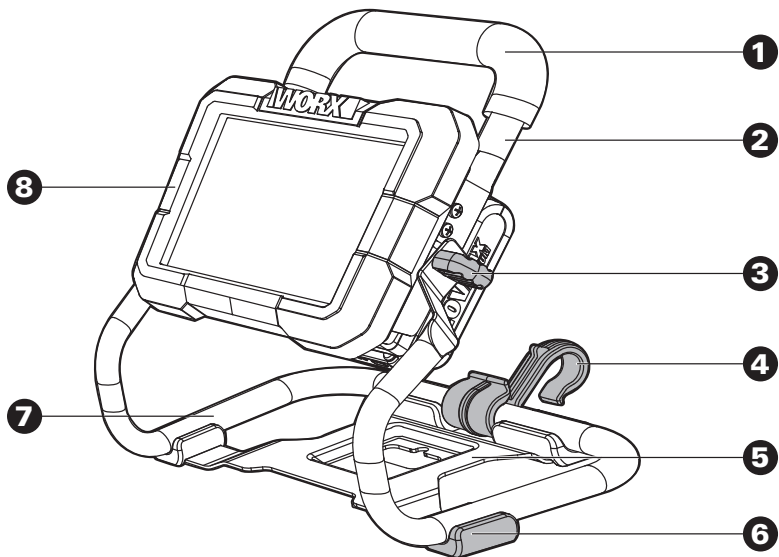

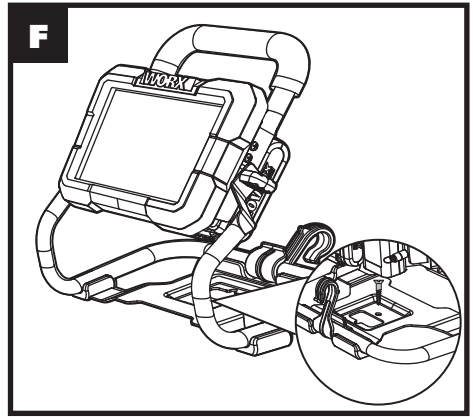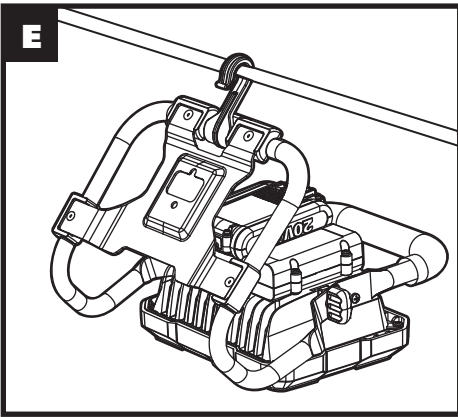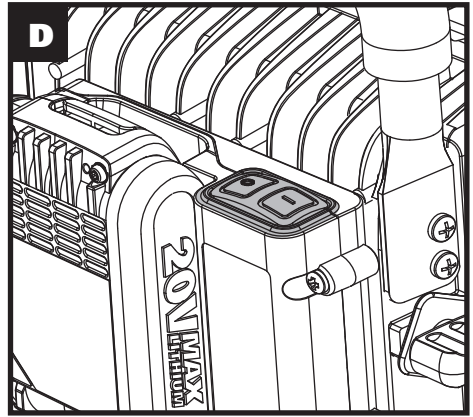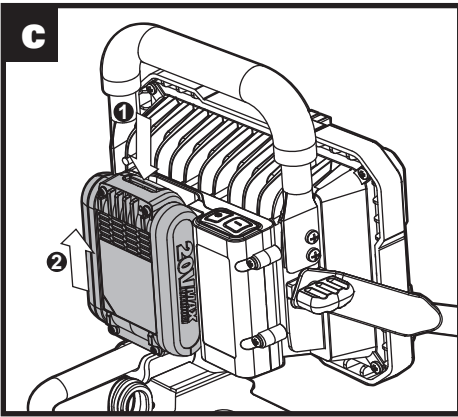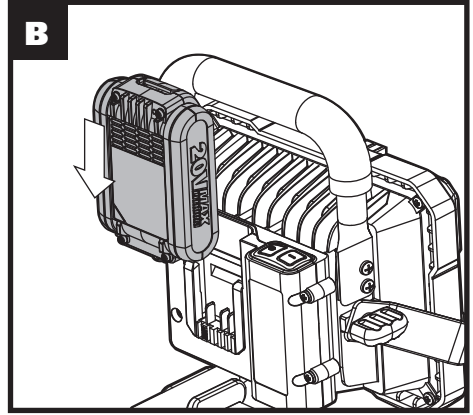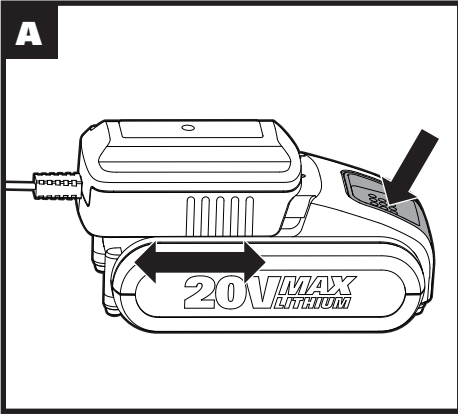

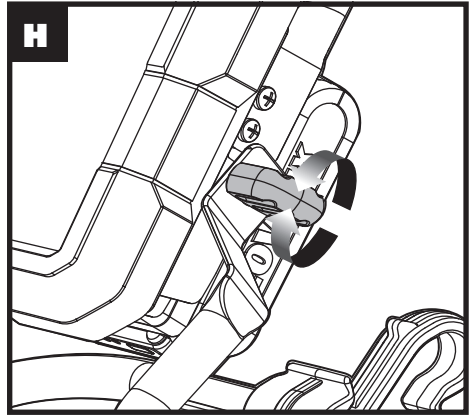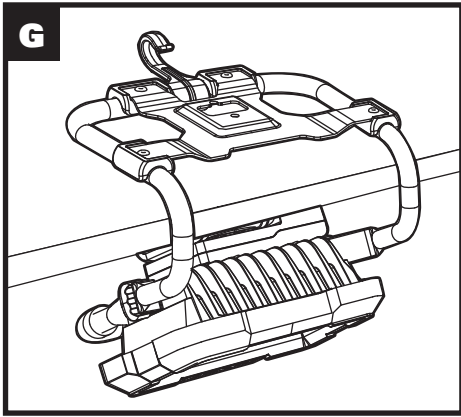

1. HANDLE SLEEVE

2. HANDLE

3. ADJUSTING KNOB

4. HOOK

5. BRACKET SEAT

6. RUBBER PAD

7. BRACKET


8. FRONT COVER

9. ON / OFF SWITCH

Not all the accessories illustrated or described are included in standard delivery.

TECHNICAL DATA

Type **WX026 WX026.9**(0- designation of machinery, representative of Lamp)

	WX026	WX026.9
Rated voltage	20V  Max*	
Charger voltage	100-240V ~ 50/60Hz	
Working time	2h	**
Lumen	1500LM	
Machine weight	2.2kg	1.8kg

*Voltage measured without workload. Initial battery voltage reaches maximum of 20 volts. Nominal voltage is 18 volts.

**WX026 is a bare machine, you can choose different types of battery pack that suit your requirements best.

ACCESSORIES

	WX026	WX026.9
Battery Pack (2.0Ah WA3551.1)	1	/
Charger(0.4A WA3760)	1	/

CORDLESS FLASHLIGHT SAFETY WARNINGS













WARNING: Be sure to read and understand all instructions in this manual before using this flashlight. Failure to follow all instructions may result in electric shock, fire and/or serious personal injury.

- Please read and observe all safety warnings and instructions enclosed with the battery or the power tool, with which the battery was provided.**
- Handle the cordless flashlight with care.** The cordless flashlight generates intense heat, which leads to increased danger of fire and explosion.
- Do not work with the cordless flashlight in hazardous areas.**
- Do not direct the light beam at persons or animals and do not stare into the light beam yourself.**
- Do not cover off the lamp head while operating the cordless flashlight.** The lamp head heats up during operation and can cause burns when the heat accumulates.
- Do not stare into the light beam for longer periods.** The optical radiation can be harmful for your eyes.
- Use the cordless flashlight only with specifically designated battery pack.** Use of any other battery packs may create a risk of injury and fire.

SAFETY WARNINGS FOR BATTERY PACK

- Do not dismantle, open or shred cells or battery pack.**
- Do not short-circuit a battery pack. Do not store battery packs haphazardly in a box or drawer where they may short-circuit each other or be short-circuited by conductive materials.** When battery pack is not in use, keep it away from other metal objects, like paper clips, coins, keys, nails, screws or other small metal objects, that can make a connection from one terminal to another. Shorting the battery terminals together may cause burns or a fire.
- Do not expose battery pack to heat or fire. Avoid storage in direct sunlight.**
- Do not subject battery pack to mechanical shock.**
- In the event of battery leaking, do not allow the liquid to come into contact with the skin or eyes. If contact has been made, wash the affected area with copious amounts of water and seek medical advice.**
- Seek medical advice immediately if a cell or battery pack has been swallowed.**
- Keep battery pack clean and dry.**
- Wipe the battery pack terminals with a**

SYMBOLS

	To reduce the risk of injury, user must read instruction manual
	Do not expose to rain or water
	Do not burn
	Class III
	Do not stare at the operating light source
 Li-Ion	Do not dispose of batteries. Return exhausted batteries to your local collection or recycling point.
	
 N5112	RCM marking
 	Waste electrical products must not be disposed of with household waste. Please recycle where facilities exist. Check with your local authorities or retailer for recycling advice.

ABN: Australian Business Number. By this number, business information such as entity type, status, business location etc. can be found at website <http://abr.business.gov.au>.
ABN of Positec Australia Pty Limited is 14 101 682 357

x1NR18/65-y: Cylindrical lithium Ion battery cells with max diameter of 18mm and max height of 65mm; "x" represents a number cells serial connected, blank if 1; "-y" represents a number of cells paralleled connected, blank if 1.

clean dry cloth if they become dirty.

- i) **Battery pack needs to be charged before use. Always refer to this instruction and use the correct charging procedure.**
- j) **Do not maintain battery pack on charge when not in use.**
- k) **After extended periods of storage, it may be necessary to charge and discharge the battery pack several times to obtain maximum performance.**
- l) **Battery pack gives its best performance when it is operated at normal room temperature (20°C ± 5°C).**
- m) **When disposing of battery packs, keep battery packs of different electrochemical systems separate from each other.**
- n) **Recharge only with the charger specified by WORX. Do not use any charger other than that specifically provided for use with the equipment.** A charger that is suitable for one type of battery pack may create a risk of fire when used with another battery pack.
- o) **Do not use any battery pack which is not designed for use with the equipment.**
- p) **Keep battery pack out of the reach of children.**
- q) **Retain the original product literature for future reference.**
- r) **Remove the battery from the equipment when not in use.**
- s) **Dispose of properly.**

6

SAVE THESE INSTRUCTIONS

LED Worklight




WX026 WX026.9

OPERATING INSTRUCTIONS



NOTE: Before using the tool, read the instruction book carefully.

OPERATION

ACTION	FIGURE
BEFORE OPERATION	
Charging the battery Pack	See Fig. A
Installing the battery pack	See Fig. B
Removing the battery pack	See Fig. C
OPERATION	
Starting & Stopping To start your light just depress on/off switch(9) marked "I". To stop your light just depress the on/off switch(9) marked "O".  WARNING! Do not direct the light beam into your eyes.	
Placing the light  WARNING! Ensure the work light is securely placed to prevent falling object hazard.	
Using the hook to hang the light  WARNING! Do not hang the work light on any electrical power cord!	
Using the bracket to set the light Add: You may use a screw to secure the work light in place.	
Using the bracket to hang the light	See Fig. G
Adjustable head The work light head can be set in a variety of positions. To switch base positions, rotate the adjusting knob to loosen the light. Adjust head to desired position , tighten the adjusting knob. CAUTION! Do not place hands or fingers between adjustable head and bracket when positioning work light to avoid any hazard!	

MAINTENANCE

We recommend that you purchase your accessories listed in the above list from the same store that sold you the tool. Refer to the accessory packaging for further details. Store personnel can assist you and offer advice.

Warning for model WX026:

LITHIUM ION BATTERY

**Handle With Care. Do Not Load or
Transport Package If Damaged.
A Fire Hazard Could Exist.**

For more information, call: +86-512-65152811

WORX
you've got the power

www.worx.com

Copyright © 2016, Positec. All Rights Reserved.
AR01250101