



# HOSHIZAKI



# IM-130NE-28

## Cube 104kg Ice Maker – Self Contained

## PRODUCT FEATURES

- New intelligent control circuit dedicated to saving power and water consumption.
- Micro computer controller controls ice making process to work at peak performance in any conditions.
- Inbuilt safety features - freeze cycle back up timer, defrost back up, low voltage and high amp protector.
- New 7 segment operational display panel for ease of use.
- Unique closed cell water circuit for ultimate contamination protection.
- Durable stainless-steel exterior.
- Easily accessible and cleanable air filters reduce costly callouts.
- Exceptionally hard crystal-clear cubes that melt slowly.
- Auto rinse and flush cycle.

## TECHNICAL DRAWING

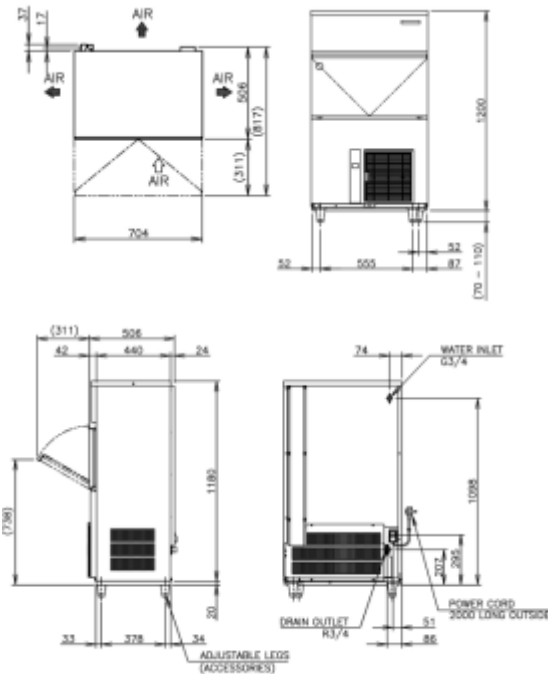

Large

## PRODUCT SPECIFICATION

|                              |   |
|------------------------------|---|
| Production Capacity / 24hrs  | Approx. 104kg @ 21°C Air temp; 15°C Water<br>Approx. 88kg @ 32°C Air temp; 21°C Water |
| Freeze Cycle Time            | Approx 22min  |
| Max Storage Capacity         | Approx. 50kg (Bin Control Setting Approx 28kg)  |
| Ice Production/ Cycle        | Approx. 1.8kg/80pcs   |
| Dimensions                   | 704mm (W) x 506mm (D) x 1,270mm (H)<br>(Includes 70mm-110mm Legs)                     |
| Cooling                      | Air   |
| Weight Net/Gross (kg)        | 76/85   |
| Refrigerant Charge           | R404a / 380g  |
| AC Supply Voltage            | 1 PHASE 220-240V 50Hz/ 10 AMP Plug  |
| Amperage                     | Running: 4.5A Rated 4.5A Starting: 19A  |
| <b>Operating Conditions:</b> |   |
| Ambient Temp                 | 1-40°C  |
| Water Supply Temp            | 5-35°C  |
| Water Supply Pressure        | 0.07-0.8MPa   |
| Voltage Range                | ±6%   |

## INSTALLATION REQUIREMENTS

- Ensure the condenser is cleaned periodically as per the manufacturer's manual.
- Do not plug the unit into multi-plug power boards with other appliances
- Room ventilation or air conditioning can improve the situation by reducing the humidity.
- Hoshizaki recommends the use of a compatible water filter to prevent non-warrantable scale & sediment complications.

\*Refer to manual for full installation & maintenance requirements.



For free 6 month extended warranty, register online within 4 weeks of purchase date. [hoshizaki.com.au](http://hoshizaki.com.au)

