


PRODUCT FEATURES

- Individual premium crescent cube with no ice bridging.
- Exceptionally hard crystal clear cubes that melt slowly.
- Durable stainless steel exterior.
- Slide in air filter at front for easy cleaning -maintaining performance efficiency.
- Double-sided stainless steel evaporator for all water conditions -produces more ice in less cycles.
- Flush mount to rear wall
- Good in hard water areas.
- Snap in water tank design easy to remove for sanitization.
- Low electrical consumption.
- Low water consumption.
- LED lights and audible alarms.

TECHNICAL DRAWING



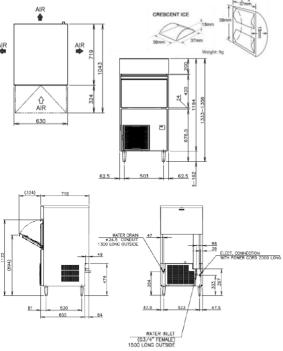

For free 6 month extended warranty. register online within 4 weeks of purchase date. hoshizaki.com.au















PRODUCT SPECIFICATION

	Production Capacity / 24hrs	Approx. 130kg @ 21°C Air temp; 15°C Water Approx. 115kg @ 32°C Air temp; 21°C Water
	Max Storage Capacity	Approx. 55kg
	Dimensions	630mm (W) x 719mm (D) x 1333mm (H)
	Cooling	Air
	Weight Net/Gross (kg)	69/81
	Refrigerant Charge	R290/110g
	AC Supply Voltage	1 PHASE 220-240V 50Hz/ 10 AMP Plug
	Amperage	Running: 3.9A Starting: 18.6A
	Operating Conditions:	
	Ambient Temp	7-38°C
	Water Supply Temp	7-32°C
	Water Supply Pressure	0.07-0.8MPa (0.7-8bar)
	Voltage Range	±6%

INSTALLATION REQUIREMENTS

- Ensure the condenser is cleaned periodically as per the manufacturer's manual.
- Do not plug the unit into multi-plug power boards with other appliances
- Room ventilation or air conditioning can improve the situation by reducing the humidity.
- Hoshizaki recommends the use of a compatible water filter to prevent non-warrantable scale & sediment complications.

^{*}Refer to manual for full installation & maintenance requirements.